



RHINO-RACK®


TOYOTA 200 Series Land Cruiser Backbone

RTLB1

Important:

1. Check the Rhino-Rack website to ensure you have the latest issue of these instructions.
2. Please refer to your fitting instruction to ensure that the roof racks are installed in the correct locations.
3. Check the contents of kit before commencing fitment and report any discrepancies.
4. Place these instructions in the vehicle's glove box after installation is complete.
5. These instructions must be followed for warranty to be upheld.

Fit Time: 1.5 hours

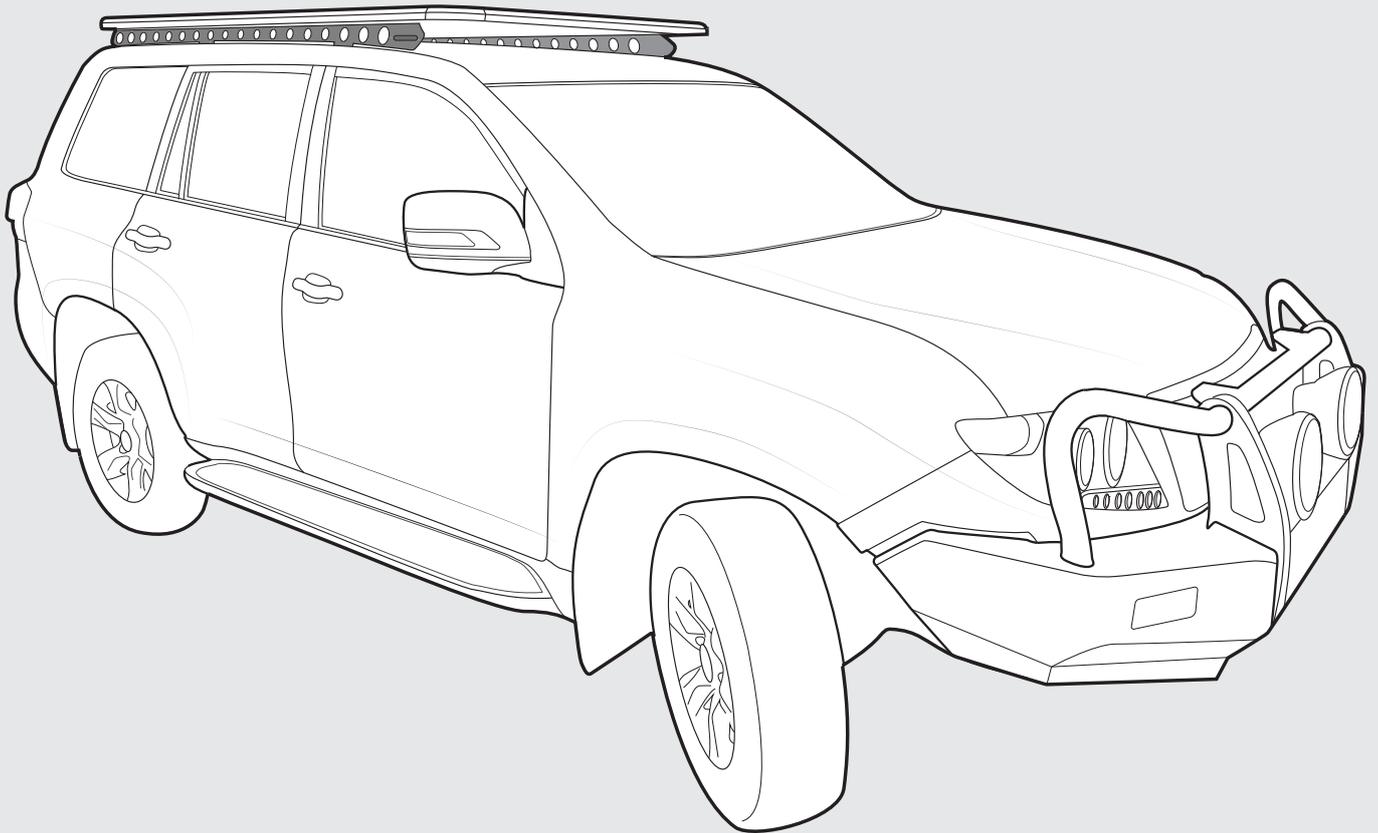

Rhino-Rack AUSTRALIA
22A Hanson Pl,
Eastern Creek, NSW, 2766
(02) 8846 1900
rhinorack.com.au

Rhino-Rack USA
Unit D, 2450 Airport Blvd,
Aurora, CO, 80011
877-744-6622
rhinorack.com


Rhino-Rack CANADA
19100 Airport Way
Pitt Meadows, BC V3Y OE2
rhinorack.ca

Document No: R805
Issue No: 06
Issue Date: 27/07/2021

RTL B1 Backbone Instructions

Carrying Capacity

Check the website and the vehicle owners hand book for your vehicle manufacturer's maximum carrying capacity. Load must be evenly distributed over the system.

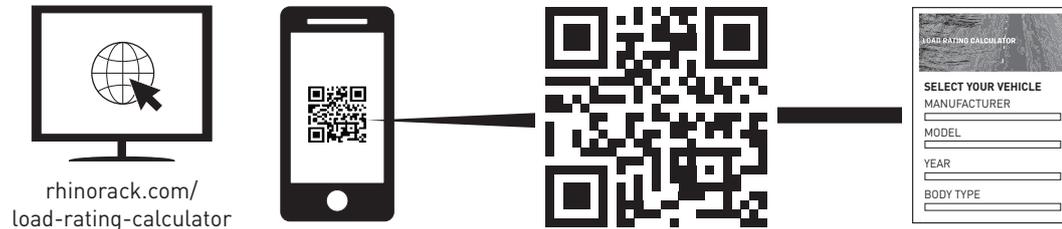

Cargo Load Limit

Total permissible weight allowed on top, and attached to roof racks whilst the vehicle is in motion.



System Weight

Total weight of the roof rack system. (Crossbars, Backbone, Platform)



Max System Load Capacity

Please ensure you use the vehicle manufacturer's maximum roof allowance if it is lower than the figure listed in the fitting chart.



Vehicle Manufacturer's Load Limit

Total permissible weight attached to the roof of the car. This is inclusive of the weight of the roof rack system.

Warning

- Check part number or kit is correct for use with your vehicle.
- Do not attempt to fit the rack system to your vehicle unless you fully understand these fitting instructions. Please direct any questions regarding fitting to the dealer from where the roof racks were purchased.
- Off-road conditions can be much more rigorous. Extreme care must be taken on any driven path that does not contain a surface protection layer (tar/bitumen).
- Roof racks must be removed when vehicle is put through an automatic car wash.
- With utility vehicles, the cabin and the canopy move independently. Roof racks and vehicle can be damaged if the item transported is rigidly fixed at points on both the cabin and canopy. Instead, rigidly fix to either the cabin roof racks or the canopy roof racks.
- Always ensure you fasten your load securely.
- Use only non-stretch fastening ropes or straps to attach cargo to your load.

In service maintenance checks

- All bolt connections should be checked after driving a short distance when you first install your roof racks.
- All bolted connections should be checked again at regular intervals (weekly is recommended, depending on road conditions, usage, loads and distances travelled).
- All bolted connections should be checked each time they are re-fitted.
- Off-road conditions are more rigorous. Check all bolted connections and your load more regularly.
- Ensure that your vehicle manufacturer's GVM, and gross axle weights are not exceeded (refer to vehicle owner's manual).

Torque Settings

Unless stated otherwise in these instructions, all fasteners should be set to the following torque settings:

M6: 4-5Nm (3-4lbs/ft),






M8: 8-10Nm (6-7.5lbs/ft)

M10: 16-18Nm (12-13lbs/ft).

Note for Dealers and Fitters

It is your responsibility to ensure these fitting instructions are given to the end user or client. These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.


RTL B1 Backbone Instructions

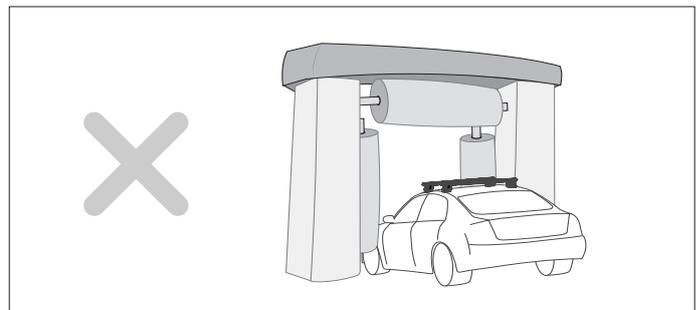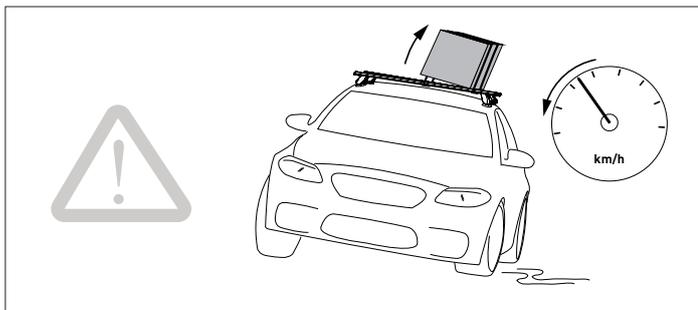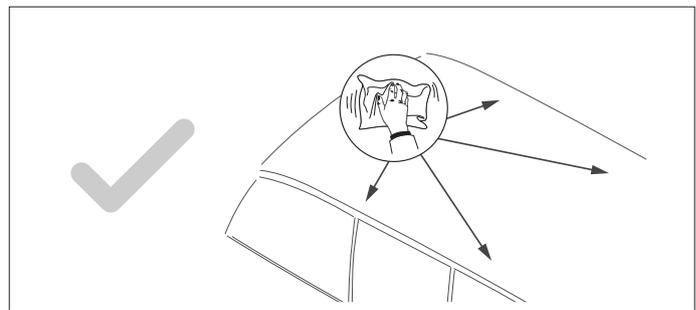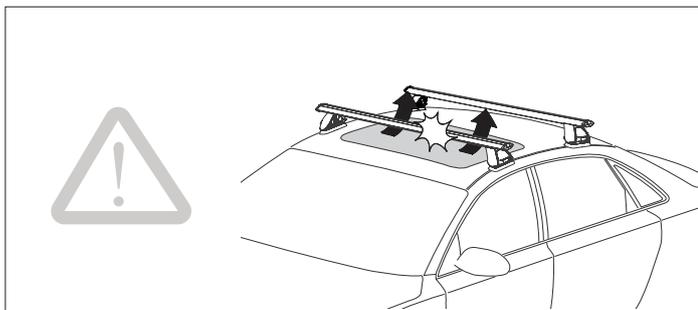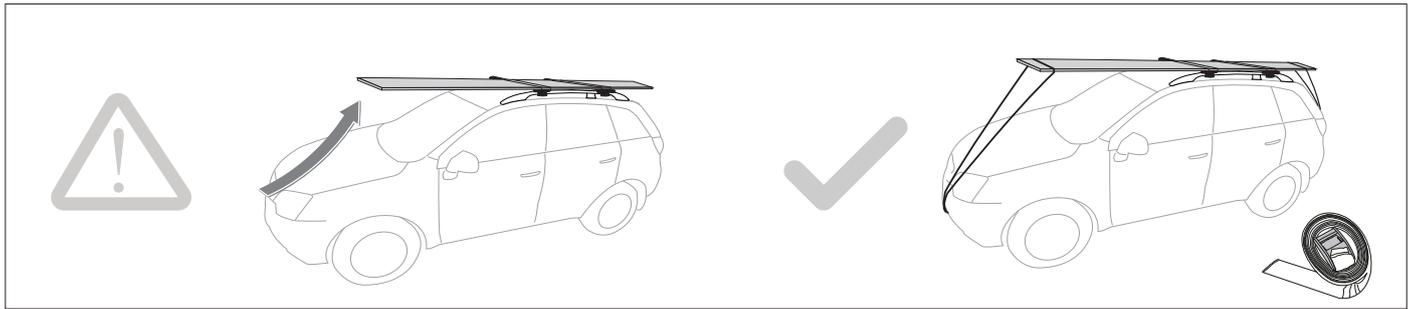

The handling characteristics of the vehicle changes when a load is transported on the roof. Exercise extreme care when transporting wind-resistant loads. Special consideration must be taken when cornering and braking.

Off-road conditions can be much more rigorous. Extreme care must be taken in off-road conditions.

System Weight: 33.5kg - 44kg
 Refer to rhinorack.com/load-rating-calculator









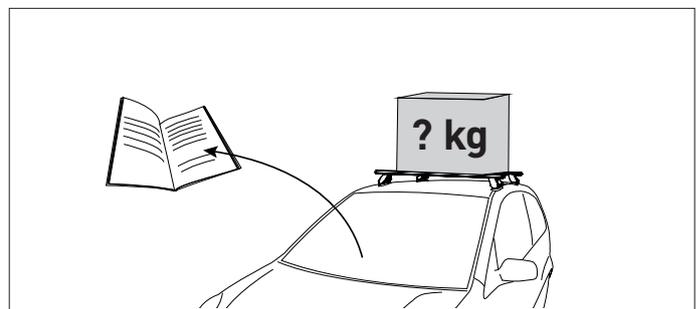


Ensure Ladder is well supported on the ground to support tent. Take extreme caution when climbing heights above 1.2m/4ft.

Paddle/ Surfboards should be fixed to the front of the vehicle.

RTL B1 Backbone Instructions

Parts List

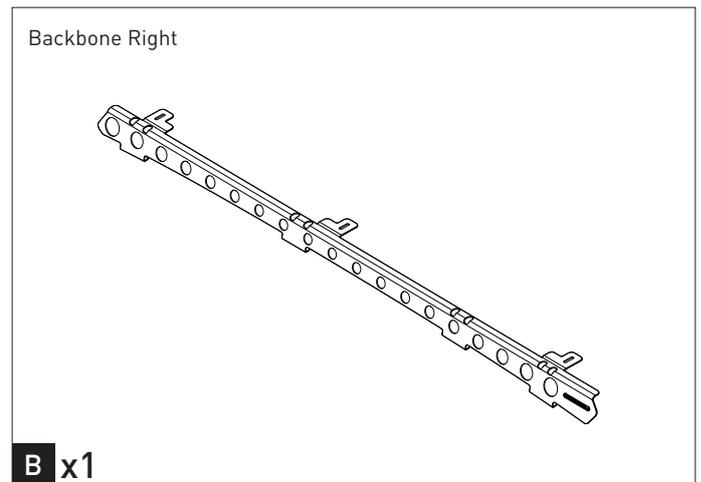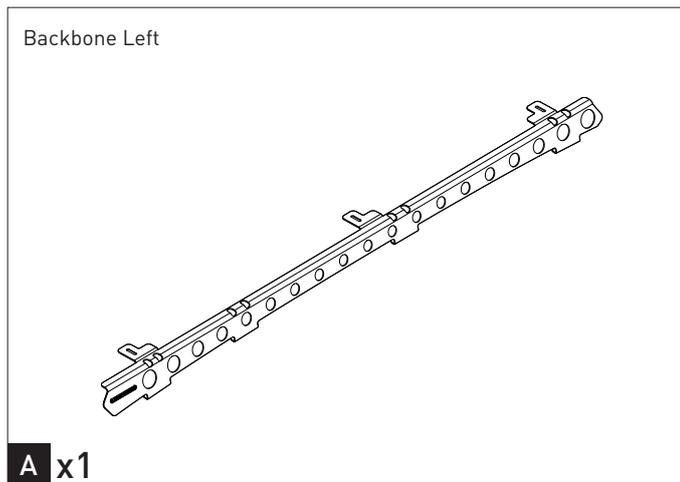


Tools Required:

- T1 - 13mm Socket Wrench/ Spanner
- T2 - 6mm Ball End Allen Key (recommended)
- T3 - Flat Blade Screw Driver
- T4 - Rattle Gun
- T5 - Cleaning Rag


FOR FIXED POINT MOUNTS

- 1a** Remove the eight mounting point covers (four per side). Remove cover, factory bracket and hardware. After removal, skip to Step **11**

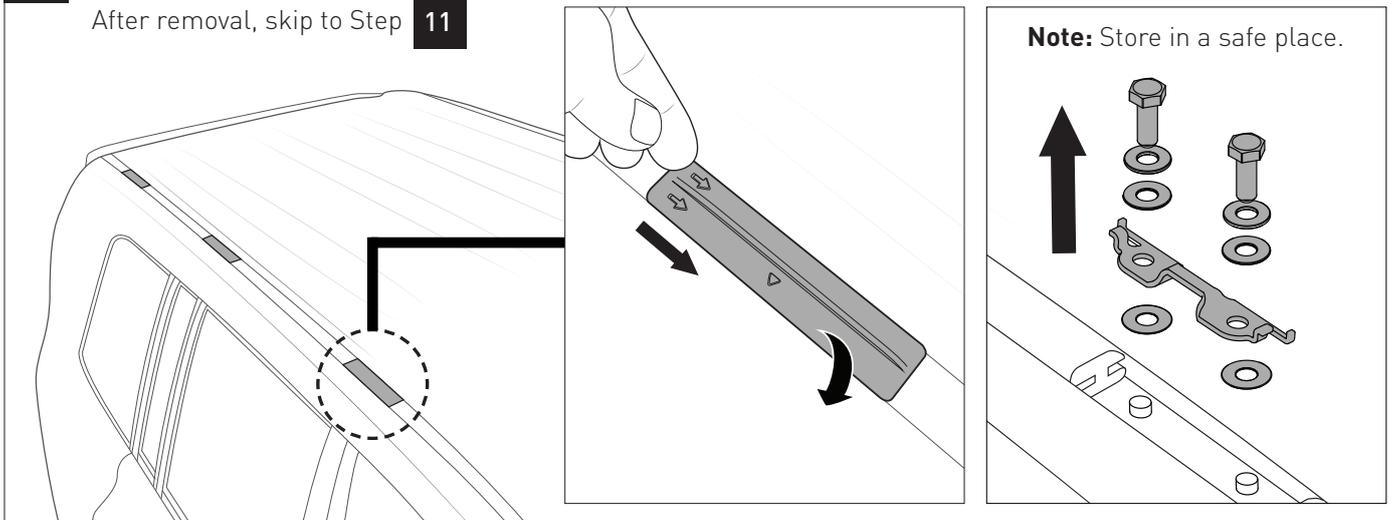


FOR FACTORY ROOF RAILS


- 1b** Remove the rail plastic covers to access the roof hardware.

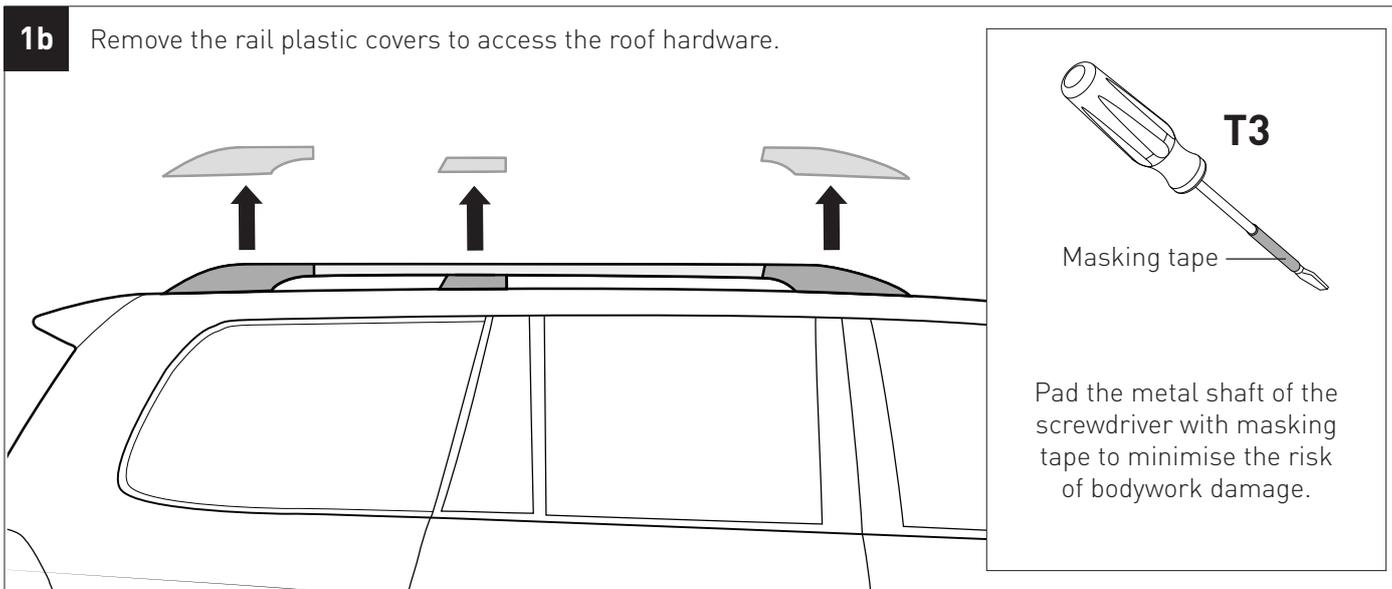







- 2** Unclip the two outside clips. Flex the covers to find where clips are resisting. Lever downwards until the clips pop out.

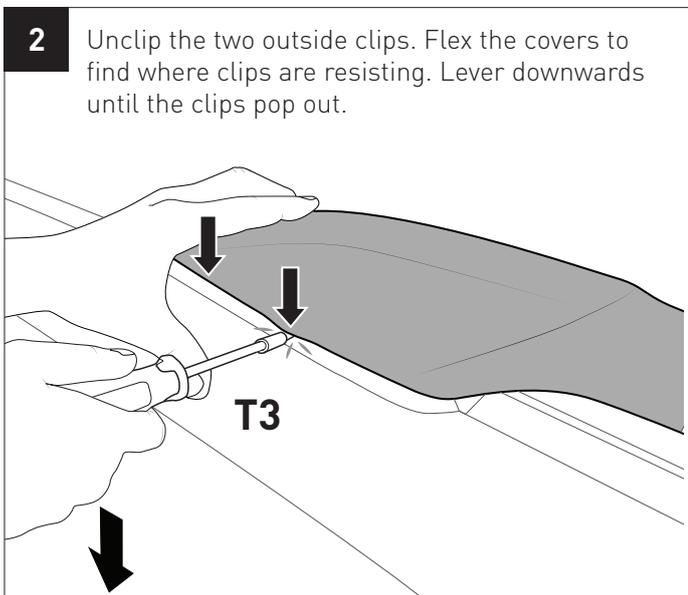

- 3** Push the front of the cover in towards the car. This will release the inside clips of the cover.

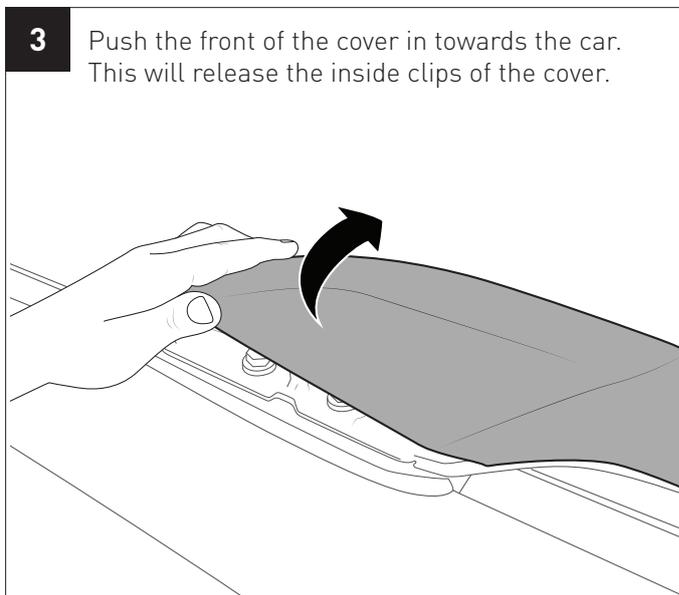


RTL B1 Backbone Instructions

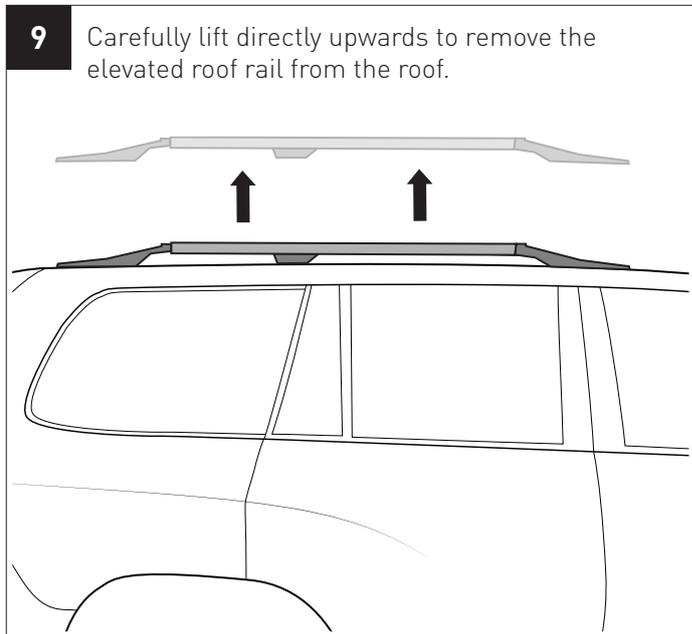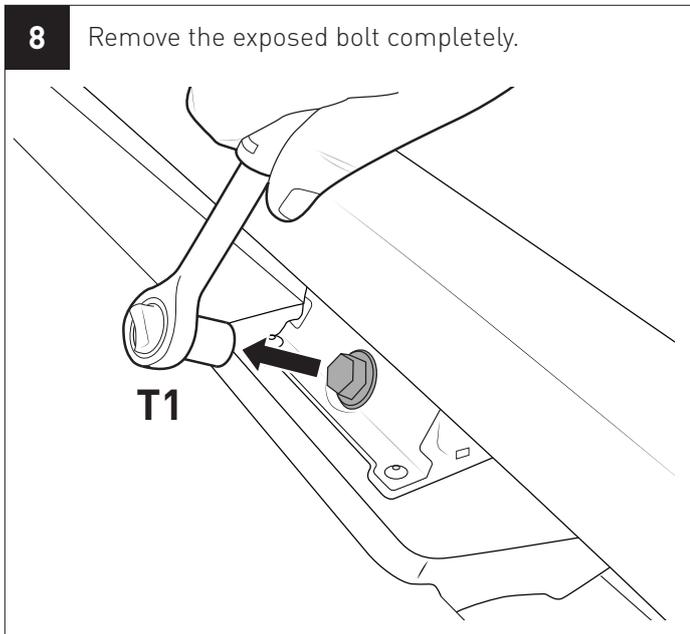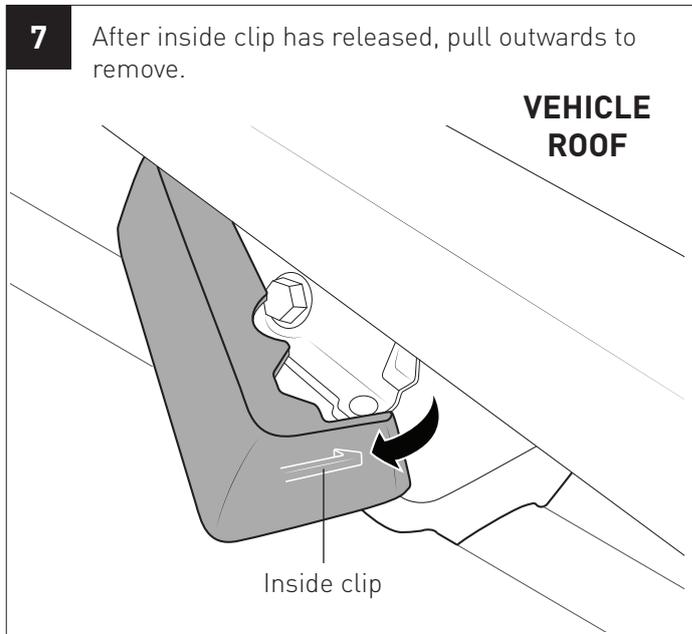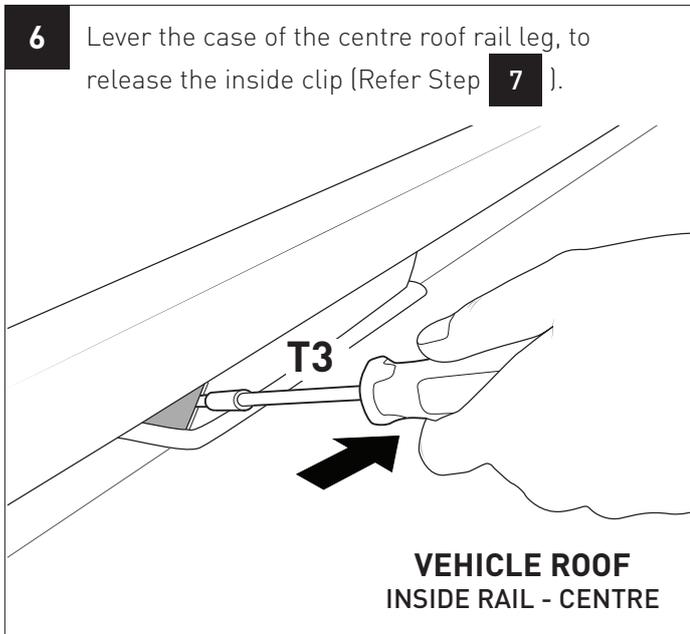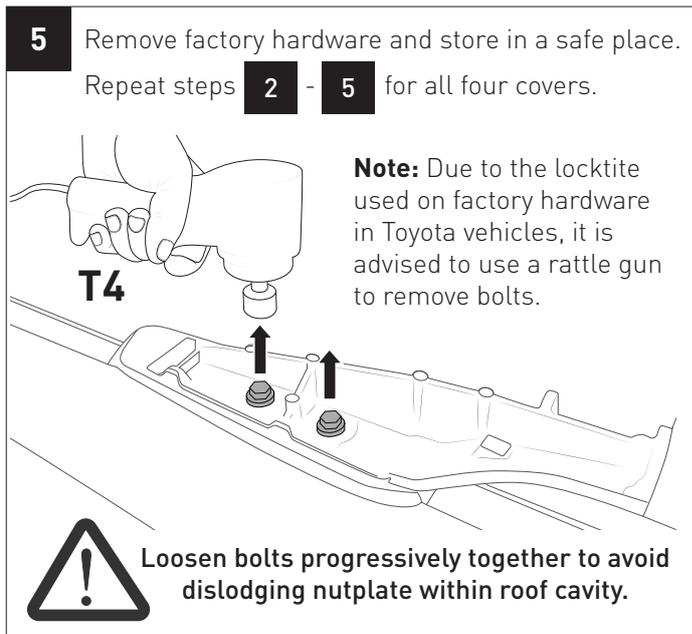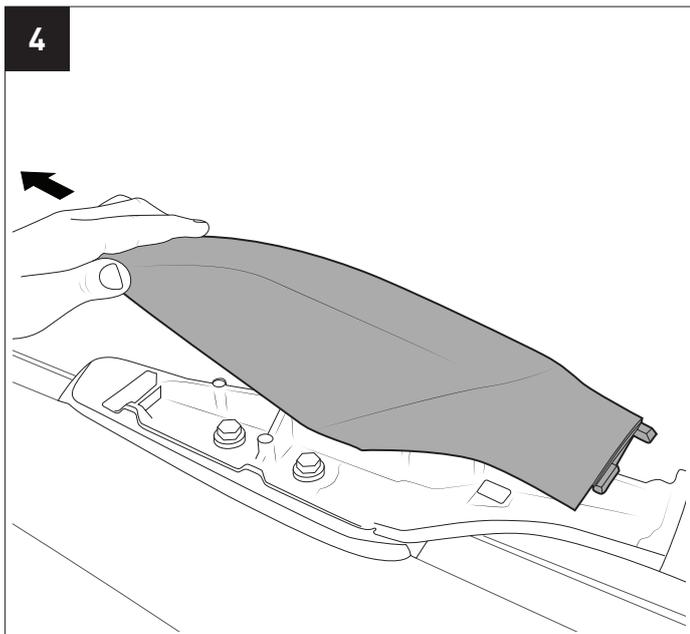


RTL B1 Backbone Instructions

- 10** Remove remaining hardware from centre fixing points.

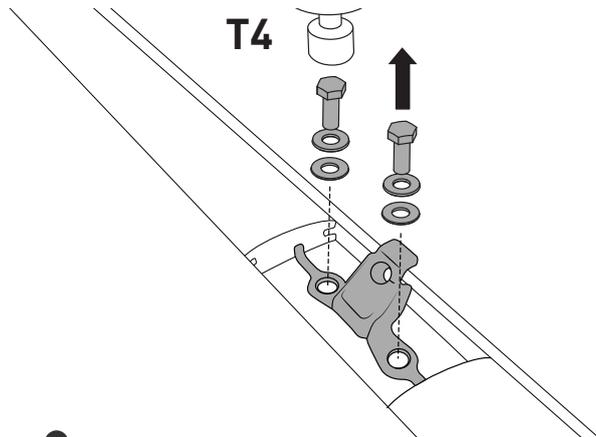


Loosen bolts progressively together to avoid dislodging nutplate within roof cavity.

- 11** Remove any dirt build-up and clean the paint work.

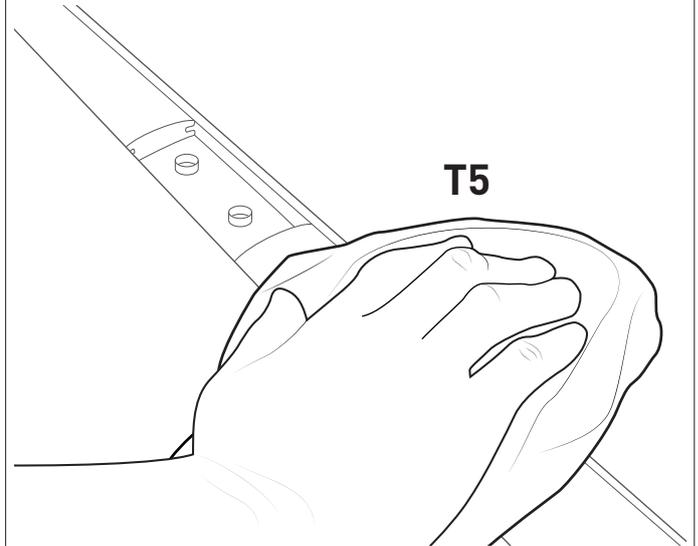


- 12** Apply butyl patch onto all 16 mounting holes. Ensure patch adheres to channel surface securely.

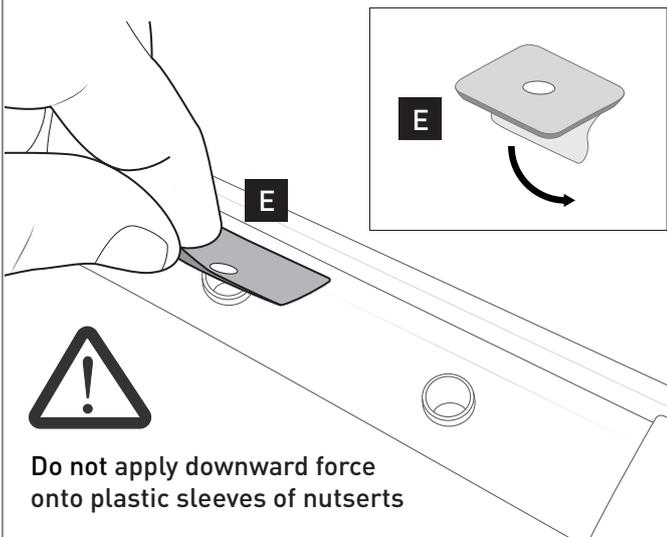


Do not apply downward force onto plastic sleeves of nutserts

- 13** Remove top cover tape of each butyl.

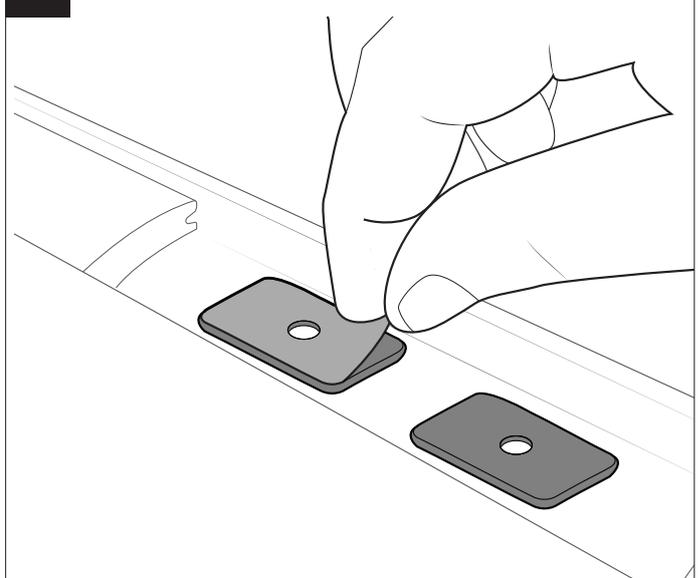

- 14** Carefully lower the backbone over the plastic sleeves (Refer Step 12).

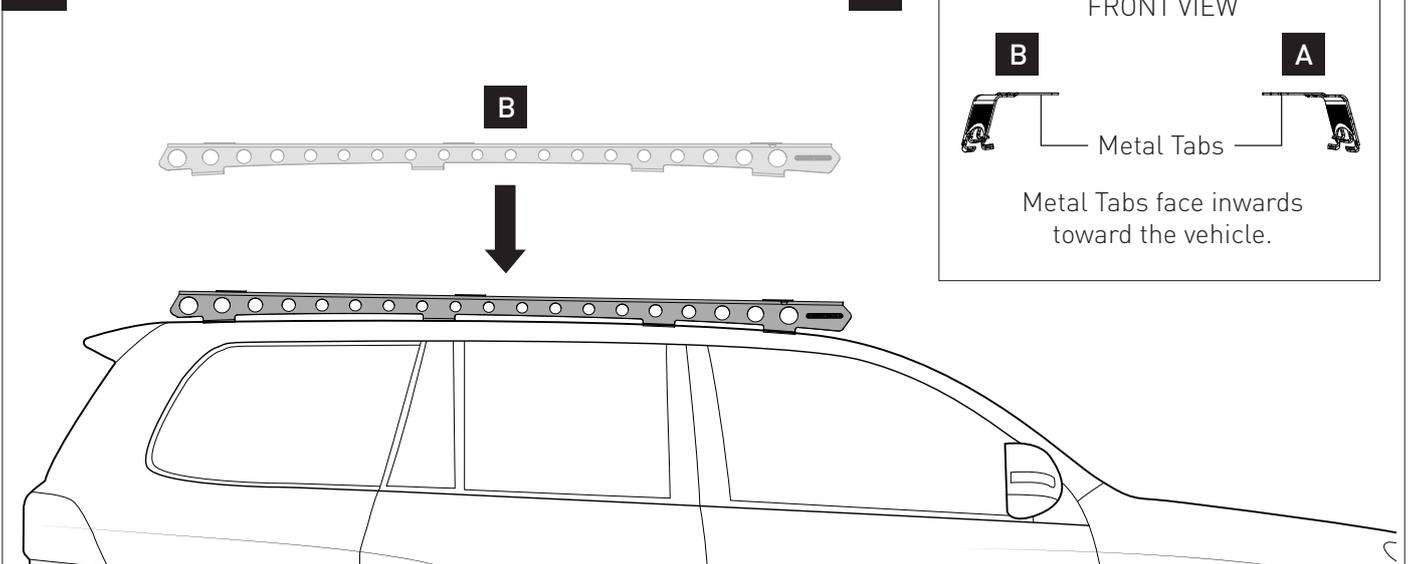


FRONT VIEW




Metal Tabs face inwards toward the vehicle.

15 Carefully start each screw.

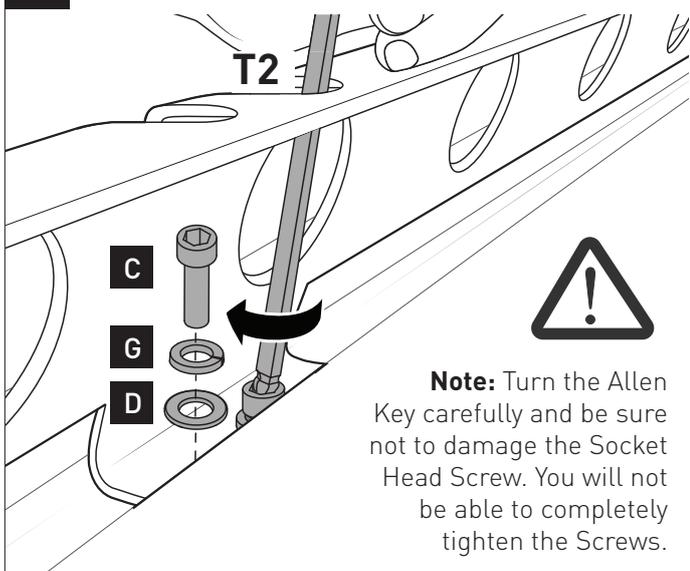


16 Tighten completely.

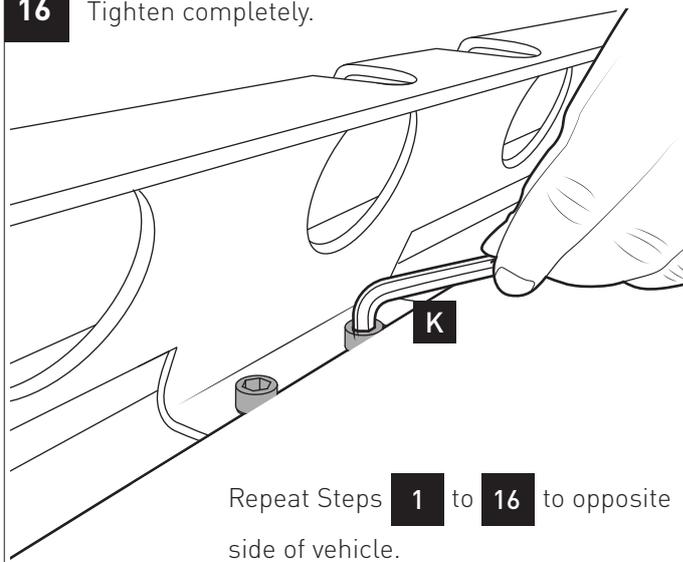

17 PLATFORM INSTALLATION




rhinorack.com/roof





EXAMPLE ONLY

VEHICLE		PIONEER		CONNECTOR		ROOF LOAD LIMIT	
YEAR	MODEL	YEAR	MODEL	YEAR	MODEL	YEAR	MODEL
<p>VEHICLE MANUFACTURER'S ROOF LOAD LIMIT</p> <p>UP TO 76 Kg / 212 lbs + 24 Kg / 53 lbs = UP TO 120 Kg / 265 lbs</p>							



View Fitting Chart

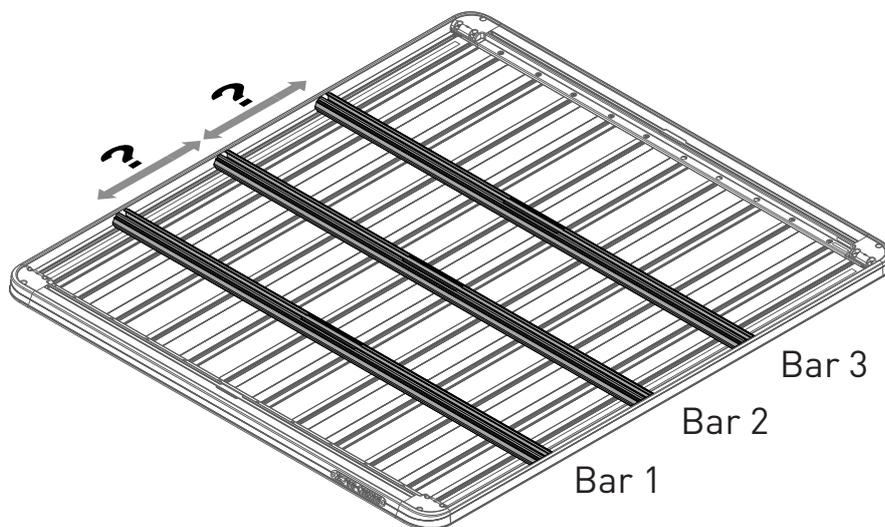



18 For 5XXXX Series Platform

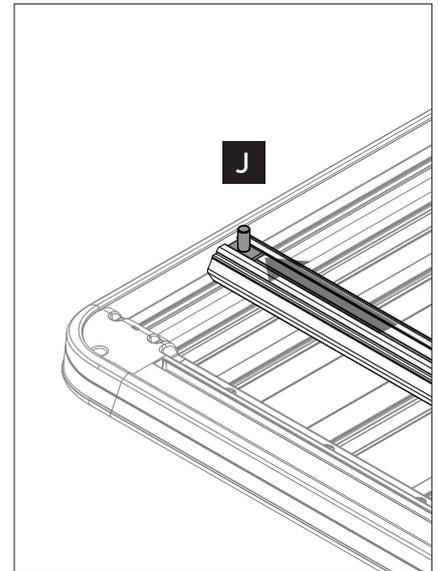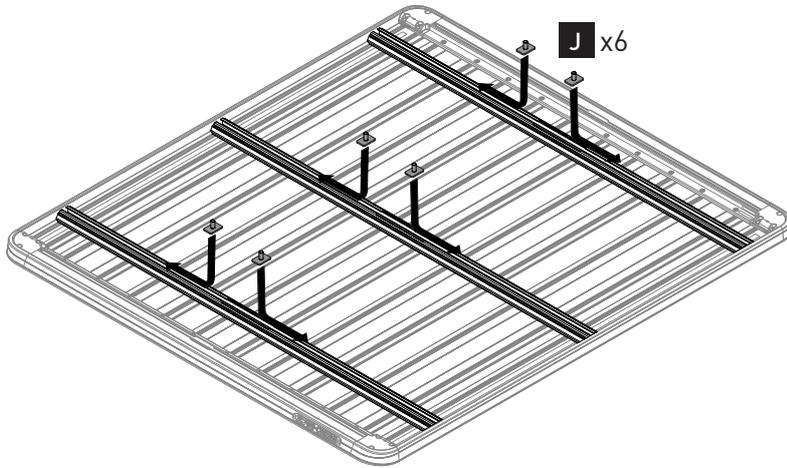



19 For 5XXXX Series Platform

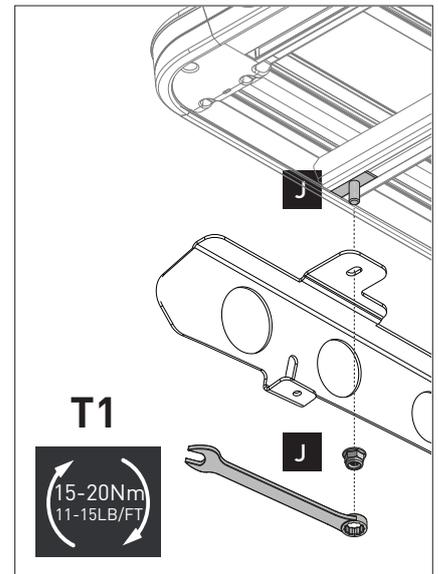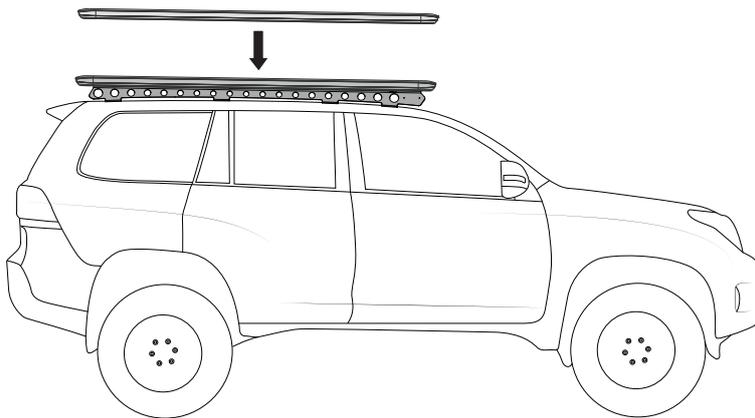


20 For 4XXXX Series Platform

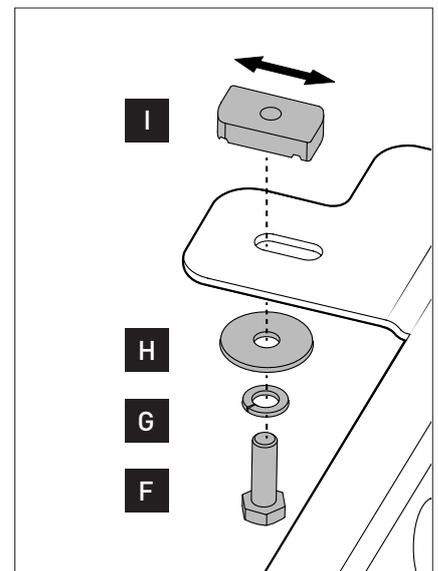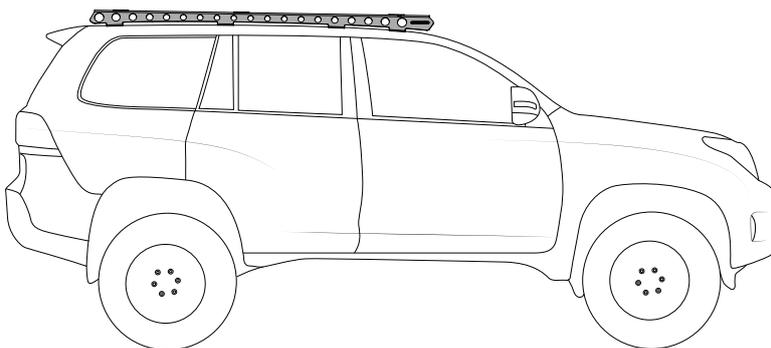

21 For 4XXXX Series Platform

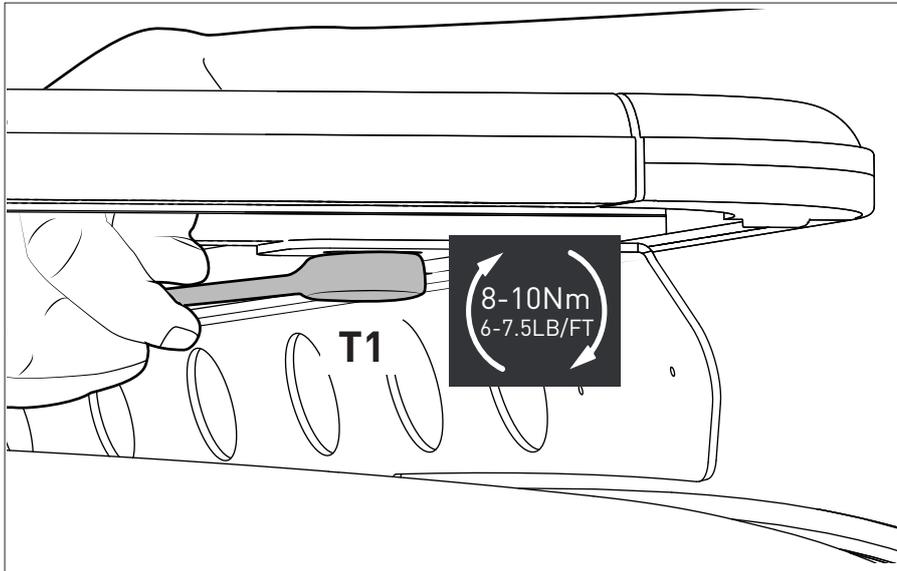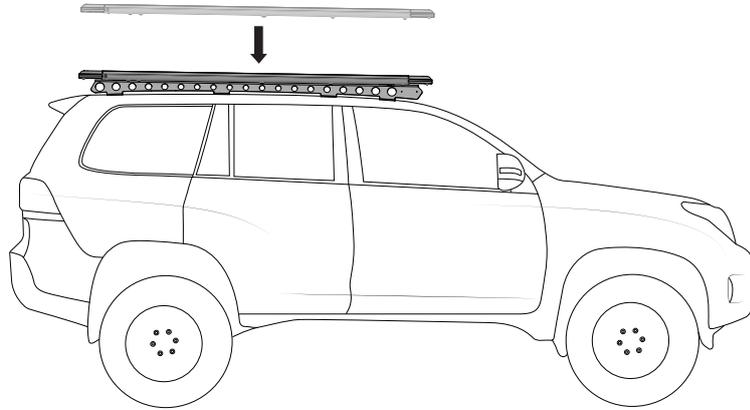

Ensure channel nut has rotated within Pioneer underbar and is fixing Pioneer securely.



Pioneer underbar